




## Bearing Argentina, S.A.

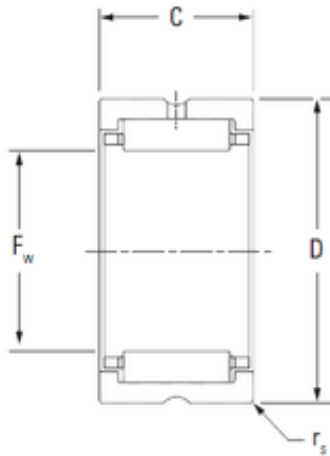

### RB4010UUC0 Separable Outer Ring Crossed Roller Bearing 40x65x10mm

Bearing No. HJ-223016

HJ-223016 Bearing 2D drawings and 3D CAD models

Size	34.925x47.625x25.4 mm
Bore Diameter	34,925 mm
Outer Diameter	47,625 mm
Width	25,4 mm
Fw	34,925 mm
D	47,625 mm
C	25,4 mm
r5 min.	1,02 mm
Weight	0,127 Kg
Basic dynamic load rating (C)	39,8 kN
Basic static load rating (C0)	64,1 kN
(Grease) Lubrication Speed	13000 r/min
Category	Needle Non Thrust Roller Bearings
Inventory	5.0
Manufacturer Name	KOYO
Minimum Buy Quantity	N/A
Weight / Kilogram	0.13
Product Group	B04144
Rolling Element	Needle Roller Bearing
Component	Roller Assembly with Outer Ring - No Inner Ring
Enclosure	Open
Self Aligning	No
Retainer	Yes



## Bearing Argentina, S.A.

Number of Rows of Rollers	Single Row
Separable	No
Closed End	No
Inch - Metric	Inch
Relubricatable	Yes
Thrust Bearing	No
Long Description	1-3/8" Bore; 1-7/8" Outside Diameter; 1" Width; Needle Roller Bearing; Roller Assembly with Outer Ring - No Inner Ring; Open Enclosure; No Self Aligning; Yes Retainer; Single Row of Rol
Other Features	2 Rib Outer Ring   Steel Cage   Heavy Duty   Oil Hole
Category	Needle Non Thrust Roller Bearing
UNSPSC	31171512
Harmonized Tariff Code	8482.40.00.00
Noun	Bearing
Keyword String	Needle
Manufacturer URL	<a href="http://www.koyousa.com">http://www.koyousa.com</a>
Manufacturer Item Number	HJ-223016
Weight / LBS	0.28
Width	1 Inch   25.4 Millimeter
Outside Diameter	1.875 Inch   47.625 Millimeter
Bore	1.375 Inch   34.925 Millimeter
Bearing No.	HJ-223016
rs(min)	1.02
Used with inner ring No.	IR-182216
Cr	25.4
C0r	64.1



## Bearing Argentina, S.A.

Cu	10.1
Grease lub.	8200
Oil lub.	13000
(Refer.) Mass(kg)	0.127
Clearance fit S(h6)(max.)	34.925
Clearance fit S(h6)(min.)	34.910
Clearance fit H(H7)(max.)	47.650
Clearance fit H(H7)(min.)	47.625
Tight transition fit S(f6)(max.)	34.900
Tight transition fit S(f6)(min.)	34.884
Tight transition fit H(N7)(max.)	47.617
Tight transition fit H(N7)(min.)	47.592
Da	42.88