




Bearing Argentina, S.A.

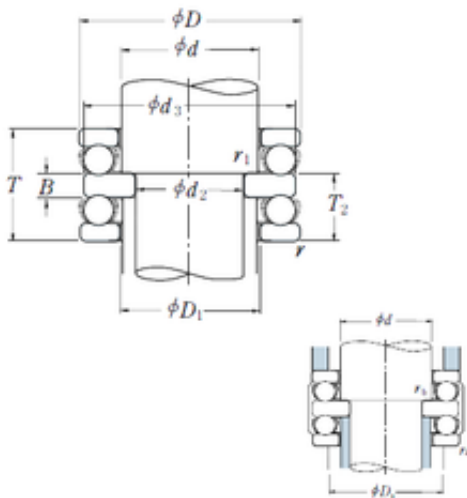

75 mm x 135 mm x 18 mm RA6008UUC0-E /
RA6008UUCC0-E Crossed Roller Bearing
60x76x8mm

Bearing No. 52315

52315 Bearing 2D drawings and 3D CAD models

Size	75x135x79 mm
Bore Diameter	75 mm
Outer Diameter	135 mm
Width	79 mm
d	75 mm
d2	60 mm
D	135 mm
T	79 mm
T2	48,5 mm
d3	135 mm
r min.	1,5 mm
r1 min.	1 mm
B	18 mm
D1	77 mm
Da max.	105 mm
ra max.	1,5 mm
rb max.	1 mm
Weight	4,74 Kg
Basic dynamic load rating (C)	159 kN
Basic static load rating (C0)	365 kN
(Grease) Lubrication Speed	1200 r/min
Category	Thrust Ball Bearing
Inventory	0.0
Manufacturer Name	NSK



Bearing Argentina, S.A.

Minimum Buy Quantity	N/A
Weight / Kilogram	4.85
Product Group	B00308
Rolling Element	Ball Bearing
Thrust Bearing	Yes
Single or Double Direction	Double Direction
Banded	No
Cage Material	Steel
Precision Class	Non-Precision
Component Description	Roller Assembly Plus Raceways
Other Features	Double Row With Flat Seat
Long Description	60MM Bore 1; 77MM Bore 2; 135MM Outside Diameter; 79MM Height; Ball Bearing; Double Direction; Not Banded; Steel Cage; Non-Precision
Inch - Metric	Metric
Category	Thrust Ball Bearings
UNSPSC	31171552
Harmonized Tariff Code	8482.10.50.08
Noun	Bearing
Keyword String	Ball Thrust
Manufacturer URL	http://www.nskamericas.com
Manufacturer Item Number	52315
Weight / LBS	10.45
Bore 2	3.031 Inch 77 Millimeter
Bore 1	2.362 Inch 60 Millimeter
Overall Height with Aligning Washer	0 Inch 0 Millimeter
Height	3.11 Inch 79 Millimeter
Outside Diameter	5.315 Inch 135 Millimeter
bore diameter:	60 mm



Bearing Argentina, S.A.

static load capacity:	82500 lbf
outside diameter:	135 mm
dynamic load capacity:	35500 lbf
overall width:	79 mm
operating temperature range:	Maximum of +120 ° C
thrust bearing type:	Double-Direction
maximum rpm:	1900 rpm
outside diameter design:	Straight
cage material:	Steel Cage
separable or banded:	Separable
fillet radius:	1.5 mm
race type:	Flat
series:	52300
precision rating:	ABEC1, P0